








Living

by HARO

DE Demontage
EN Removal
FR Démontage
ES Desmontaje
IT Smontaggio
RU Демонтаж
HR Demontaža
NL Demontage
DK Afmontering
FI Purkaminen
PL Demontaż
SL Demontaža
CZ Demotáž

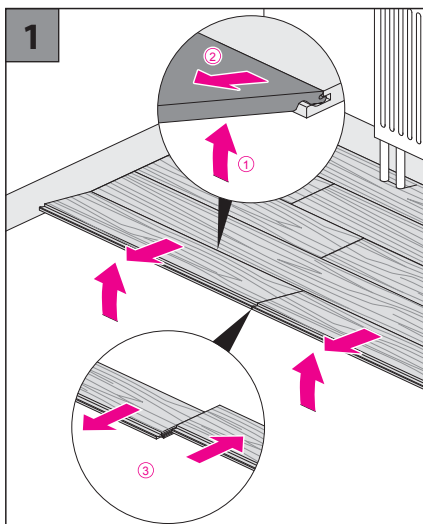

DE Reinigung und Pflege
EN Cleaning and Care
FR Nettoyage et entretien
ES Limpieza y cuidado
IT Pulizia e cura
RU Очистка и техническое обслуживание
HR Čišćenje i njega
NL Reiniging en onderhoud
DK Rengøring og vedligeholdelse
FI Puhdistus ja huolto
PL Czyszczenie i pielęgnacja
SL Čiščenje in nega
CZ Čištění a ošetřování

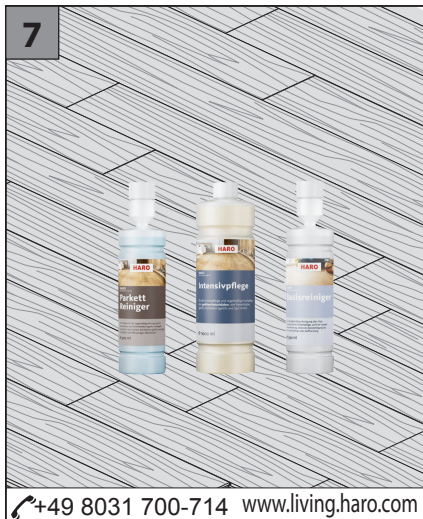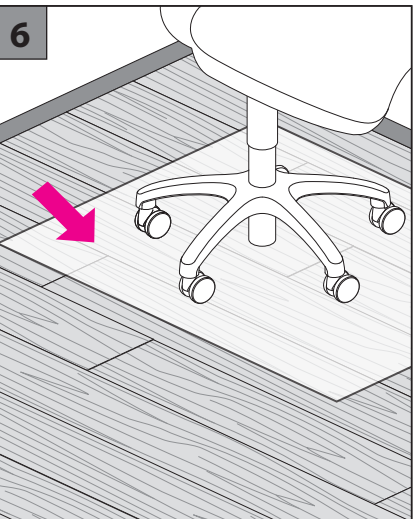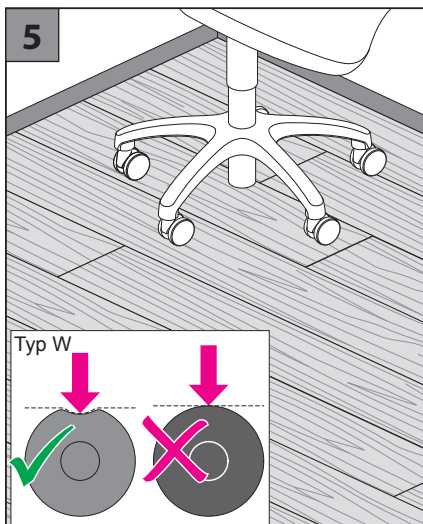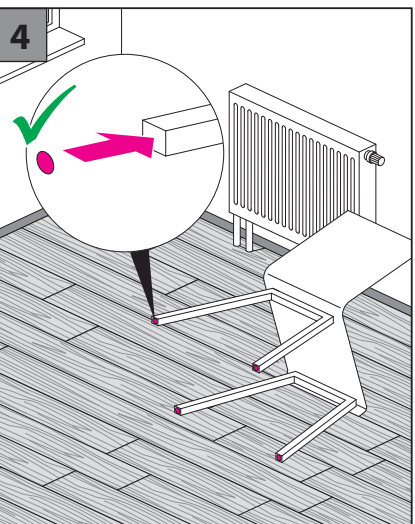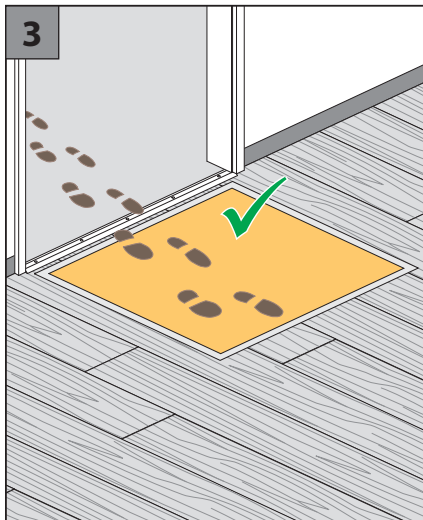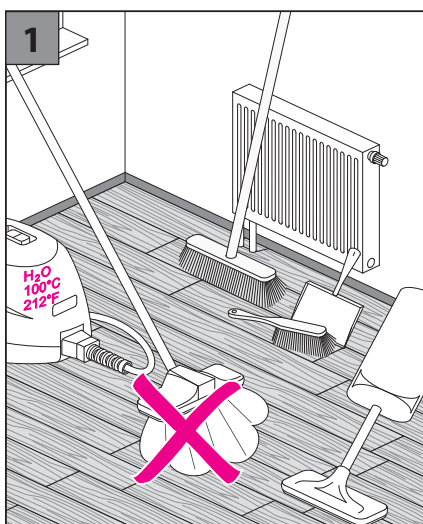

Parkettboden Parquet Floor

Made in Germany



Fold Down
locking system

Leicht zu verlegen/Easy to install
Leicht zu pflegen/Easy to clean

- DE Verlege- und Pflegeanleitung
- EN Laying and Care Instructions
- FR Instructions de pose et d'entretien
- ES Instrucciones de instalación y mantenimiento
- IT Istruzioni per la posa e la manutenzione
- NO DK Læggevejledning og Plejevejledning
- FI Asennusohjeet ja hoito-ohjeet
- CZ Instrukce pro pokládku a návod údržby
- RU Руководство по настилке специальное и руководство по техническому уходу
- PL Układanie i pielęgnacja
- HR Upute za polaganje i njegu



www.blauer-engel.de/uz176



- DE Leichte und schnelle Verlegung ohne Leim
- EN Fast and easy installation without glue
- FR Pose rapide et simple sans colle
- ES Instalación fácil y rápida sin cola

- IT Posa facile e rapida senza colla
- RU Легкая и быстрая установка без клея
- HR Lagano i brzo polaganje bez ljepila



- DE Längsseitig winkeln, stirnseitig ab-senken und einrasten
- EN Engage in the long side angle, lower at the short side and lock in place
- FR Emboîter sur la longueur, abaisser à l'about et enclencher
- ES Encuadrar en sentido longitudinal, asentar en la parte frontal y encajar

- IT Inserire inclinato sul lato lungo, abbassare sul lato corto e far scattare l'incastro
- RU Элемент сгибается по продольной стороне, опускается с торца и вводится в паз
- HR Uzdužno zakreniti pod kutom, spustiti s čelone strane i umetnuti u utor



- DE Formstabile, passgenaues Mehrschichtparkett, Renovierung möglich
- EN Multi-layer parquet is dimensionally stable, has a perfect fit, and can be renovated
- FR Parquet multicouche, stabilité dimensionnelle et précision d'assemblage, rénovation possible
- ES Parquet de varias capas, de forma estable y ajuste preciso; renovación posible

- IT Parquet multistrato resistente alla deformazione e preciso negli incastri, consente rinnovi
- RU Формоустойчивость, точность пригонки, ремонт возможен
- HR Višeslojni precizno rezani parket stabilnog oblika, s mogućnošću renoviranja



- DE Wohnfertige Oberfläche, widerstandsfähig und pflegeleicht
- EN Surface finished, hard-wearing and easy to clean
- FR Surface vitrifiée, ultra-résistante et facile à nettoyer
- ES Superficie barnizada, resistente y de fácil mantención

- IT Subito calpestabile, resistente e di facile manutenzione
- RU Износостойкая и легкая для ухода поверхность, готовая для установки в жилых помещениях
- HR Površina spremna za stanovanje, otporna i laka za održavanje



- DE Für Fußbodenheizung geeignet
- EN Suitable for use over underfloor heating
- FR Adapté au montage sur chauffage au sol

- ES Adecuado sobre calefacción de suelo
- IT Adatto per riscaldamento a pavimento
- RU Предназначен для полов с обогревом
- HR Prikladan za podno grijanje



NDS 08-821
EN 14342:2013
NB0765, NB0766
Bodenbelag für den trockenen Innenbereich / Revêtement de sol pour les intérieurs secs
3-Schicht-Parkett / Parquet 3-plis
EN 13489:2017



NDS 08-821
BS EN 14342:2013
NB0321
Floor covering for internal use under dry conditions
3-layer-parquet
EN 13489:2017

Gesamtdicke / Thickness / Épaisseur	11 mm (HDF)	12 mm (HDF)	13,5 mm (HDF)	Silent CT + 2 mm
Wärmeleitfähigkeit / Thermal conductivity / Conductivité thermique	0,174	0,117	0,172	0,119
Mindest-Dichte / Minimum Density / Densité minimale	500 kg/m³			
Brandverhalten / Reaction to fire / Réaction au feu	D ₀ - s1			
Emission von Formaldehyd / Emission of formaldehyde / Émission de formaldéhyde	E1			
Gehalt an PCP / Content of PCP / Contenu du PCP	≤ 5x10 ⁻⁶ m			
Abgabe anderer gefährlicher Stoffe / Emission of other dangerous substances / Dégagement d'autres matières dangereuses	NPD			
Gleitwiderstand / Slip resistance / Résistance au glissement	NPD			
Dauerhaftigkeitsklasse / Durability class / Classe de Durabilité (EN 350)	Klasse 5 / Class 5 / Classe 5			













Produced under License of WO 97/47843 and Valinge Innovation AB



- DE Verpackungsinhalt: siehe Etikett
- EN Contents of carton: see label
- FR Contenu du carton : voir étiquette
- HR Sadržaj pakiranja: vidi naljepnicu
- ES Contenido del embalaje: véase la etiqueta
- IT Contenuto della confezione: vedere l'etichetta
- RU Содержание упаковки: см. содержание

Hamberger Flooring GmbH & Co. KG · Postfach 10 03 53 · 83003 Rosenheim · Germany
Telefon +49 8031 700-720 · Telefax +49 8031 700-729 · E-Mail living@haro.com · www.living.haro.com

- DE Vorbereitung
- EN Preparation
- FR Préparation
- ES Preparación
- IT Preparazione
- RU Подготовка
- HR Priprema
- NL Voorbereiding
- DK Forberedelse
- FI Valmistelut
- PL Przygotowanie
- SL Priprava
- CZ Příprava

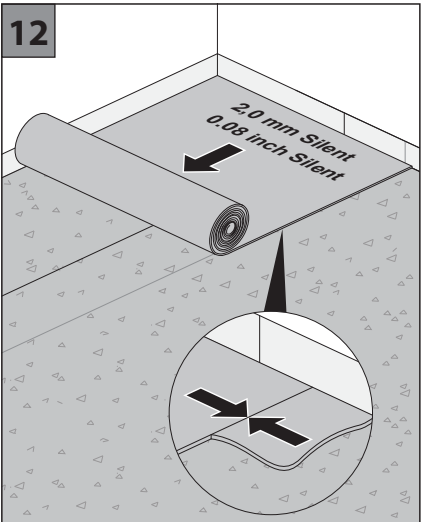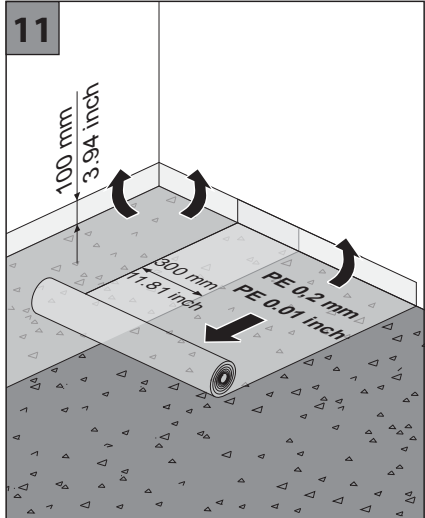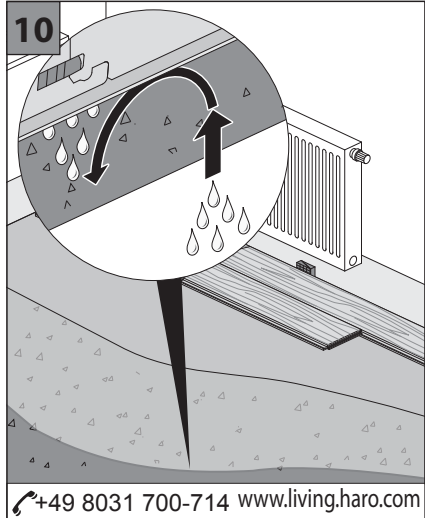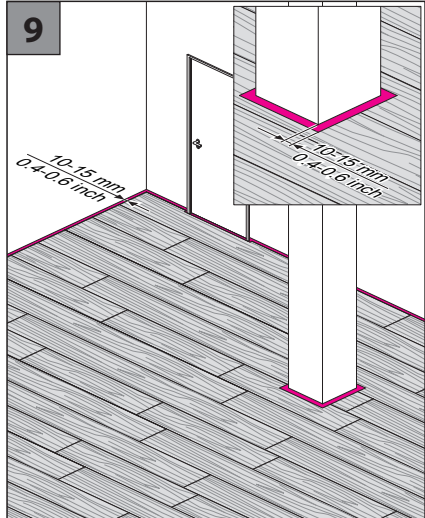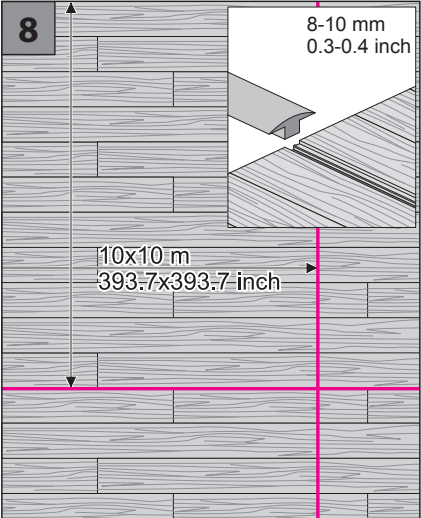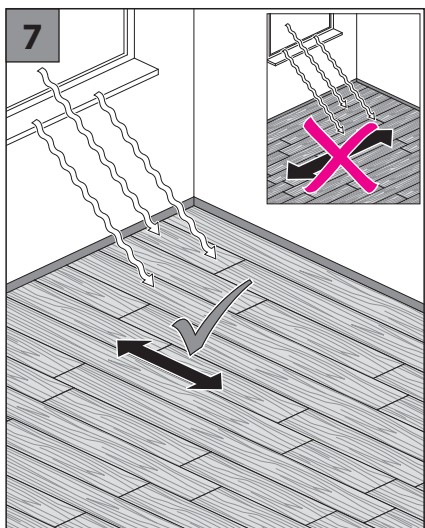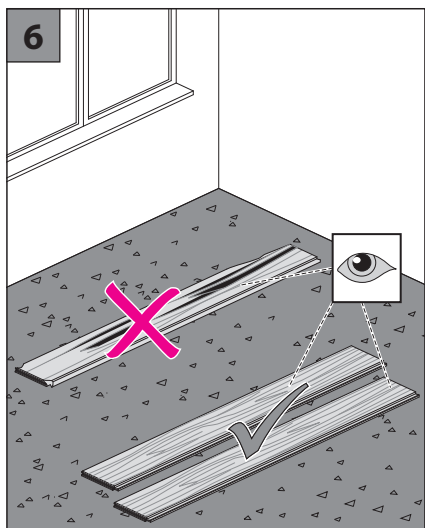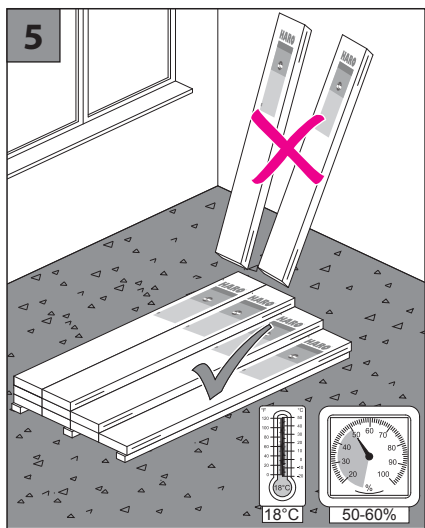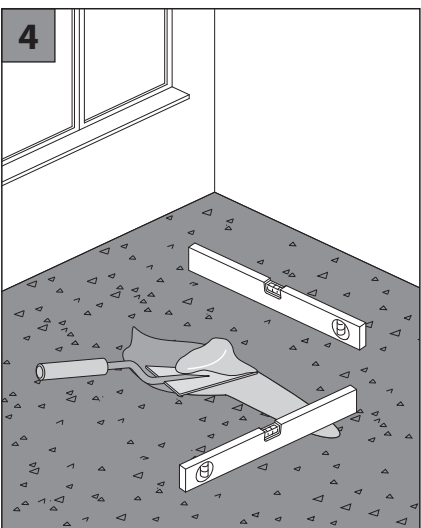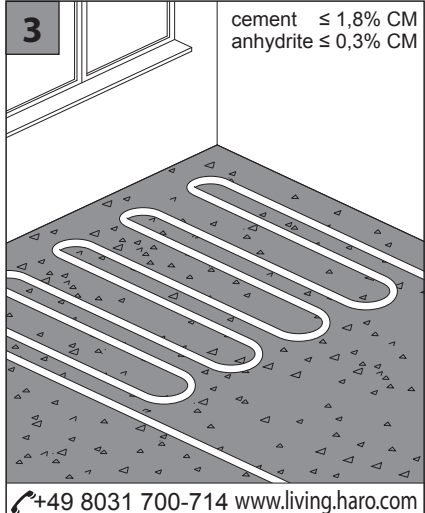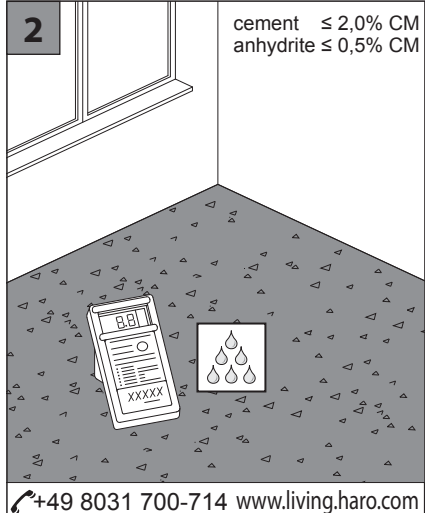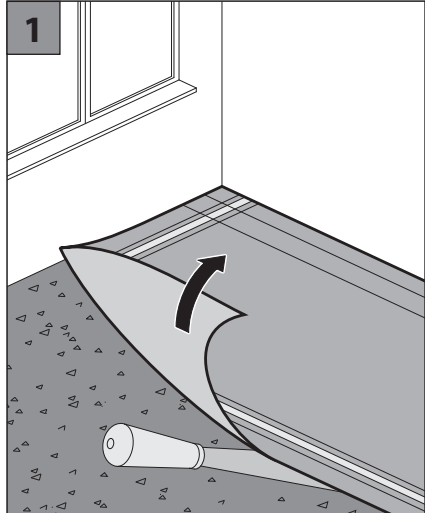

- DE Verlegung
- EN Laying
- FR Pose
- ES Colocación
- IT Posa
- RU Укладка
- HR Polaganje
- NL Parketvloer leggen
- DK Montering
- FI Asennus
- PL Układanie
- SL Polaganje
- CZ Přemístění/Přeložení

