

PRODUCT DATASHEET

SPC.T26 12 2.2 W/2700 K E14

LED SPECIAL T26 | Small special LED lamps with E14 screw base



Areas of application

- Domestic refrigerators
- Atmospheric accent lighting throughout the home
- Small designer luminaires
- Sewing machines
- Outdoor applications only in suitable luminaires

Product benefits

- Extremely small dimensions
- Good all-around light emission
- Ideal for decorative and free-burning applications
- Long lifetime of up to 15,000 h
- Three year guarantee

Product features

- LED alternative to conventional high voltage lamps
- Good quality of light; color rendering index $R_a \geq 80$; constant chromaticity



TECHNICAL DATA

Electrical data

| | |
|--|-------------|
| Nominal wattage | 2.2 W |
| Construction wattage | 2.20 W |
| Nominal voltage | 220...240 V |
| Claimed equiv. conventional lamp power | 12 W |
| Nominal current | 14 mA |
| Type of current | AC |
| Inrush current | 0.03 A |
| Operating frequency | 50/60 Hz |
| Mains frequency | 50/60 Hz |
| Max. lamp no. on circuit break. 10 A (B) | 267 |
| Max. lamp no. on circuit break. 16 A (B) | 427 |
| Total harmonic distortion | < 175 % |
| Power factor λ | 0.65 |

Photometrical data


| | |
|---|------------|
| Luminous flux | 110 lm |
| Nominal useful luminous flux 90° | 110 lm |
| Luminous efficacy | 49 lm/W |
| Lumen main.fact.at end of nom.life time | 0.90 |
| Light color (designation) | Warm White |
| Color temperature | 2700 K |
| Color rendering index Ra | ≥80 |
| Light color | 827 |
| Standard deviation of color matching | ≤6 sdcn |
| Rated LLMF at 6,000 h | 0.80 |
| Flickering metric (Pst LM) | 0.1 |
| Stroboscope effect metric (SVM) | 0.1 |

Light technical data

| | |
|------------------------------------|----------|
| Beam angle | 300 ° |
| Warm-up time (60 %) | < 0.50 s |
| Starting time | < 0.5 s |
| Rated beam angle (half peak value) | 300.00 ° |



Dimensions & Weight

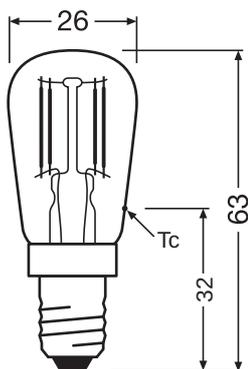

| | |
|---------------------------------|----------|
| Overall length | 63.00 mm |
| Length | 63.00 mm |
| Width (incl. round luminaires) | 26.00 mm |
| Height (incl. round luminaires) | 26.00 mm |
| Diameter | 26.00 mm |
| Maximum diameter | 26 mm |
| Product weight | 8.00 g |

Temperatures & operating conditions

| | |
|--------------------------------------|--------------|
| Ambient temperature range | -20...+40 °C |
| Maximum temperature at tc test point | 65 °C |

Lifespan

| | |
|-------------------------------------|---------|
| Nominal lamp life time | 15000 h |
| Number of switching cycles | 100000 |
| Lumen maintenance at end of serv | 0.90 |
| Rated lamp survival factor at 6,000 | ≥ 0.90 |

Additional product data

| | |
|-----------------------------|--------|
| Base (standard designation) | E14 |
| Mercury content | 0.0 mg |
| Mercury-free | Yes |
| Design / version | Clear |

| | |
|----------------|--|
| Product remark | All technical parameters apply to the entire lamp / Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value |
|----------------|--|

Capabilities

| | |
|----------|----|
| Dimmable | No |
|----------|----|

Certificates & Standards

| | |
|--|-----------------|
| Energy efficiency class | G ¹⁾ |
| Energy consumption | 3.00 kWh/1000h |
| Type of protection | IP20 |
| Standards | CE / EAC |
| Photobiological safety group acc. to EN62778 | RG0 |

¹⁾ Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)

Country-specific categorizations

| | |
|-----------------|-----------------|
| Order reference | LEDT2610 CL 2,2 |
|-----------------|-----------------|

LOGISTICAL DATA

| | |
|------------------------------|--------------|
| Temperature range at storage | -20...+80 °C |
|------------------------------|--------------|

Energy labelling regulation data acc EU 2019/2015

| | |
|---|--------------|
| Lighting technology used | LED |
| Non-directional or directional | NDLS |
| Mains or non-mains | MLS |
| Light source cap-type (or other electric interface) | E14 |
| Connected light source (CLS) | No |
| Color-tuneable light source | No |
| Envelope | No |
| High luminance light source | No |
| Anti-glare shield | No |
| Correlated colour temperature type | SINGLE_VALUE |
| Standby power | 0.00 |
| Claim of equivalent power | Yes |
| Beam angle | SPHERE_360 |
| Survival factor | 0.90 |



| | |
|--|----------------|
| LED light source replaces a fluorescent light source | not applicable |
|--|----------------|

References / Links

- For Guarantee see www.osram-lamps.com/guarantee
 - For further products and actual information concerning LED lamps see www.osram-lamps.com/led-lamps
-

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.